


Measurement Conditions

Measurement setup: CAS 140B/CT(S)/D, CAS 120, MAS 40 - 2365142E

Integration time: 10 ms	Averages: 20
Density filter: none	Serial number: 236514212
Signal level: 21 % 6492 Counts	CCD temperature: -10,18 °C
Analysis range 300 - 1000 nm	Last dark current: 0 min
Illuminant ref.: Illuminant D65 (0,3138;0,3310)	
Skiplevel:	Observer: 10 °

Spectrum

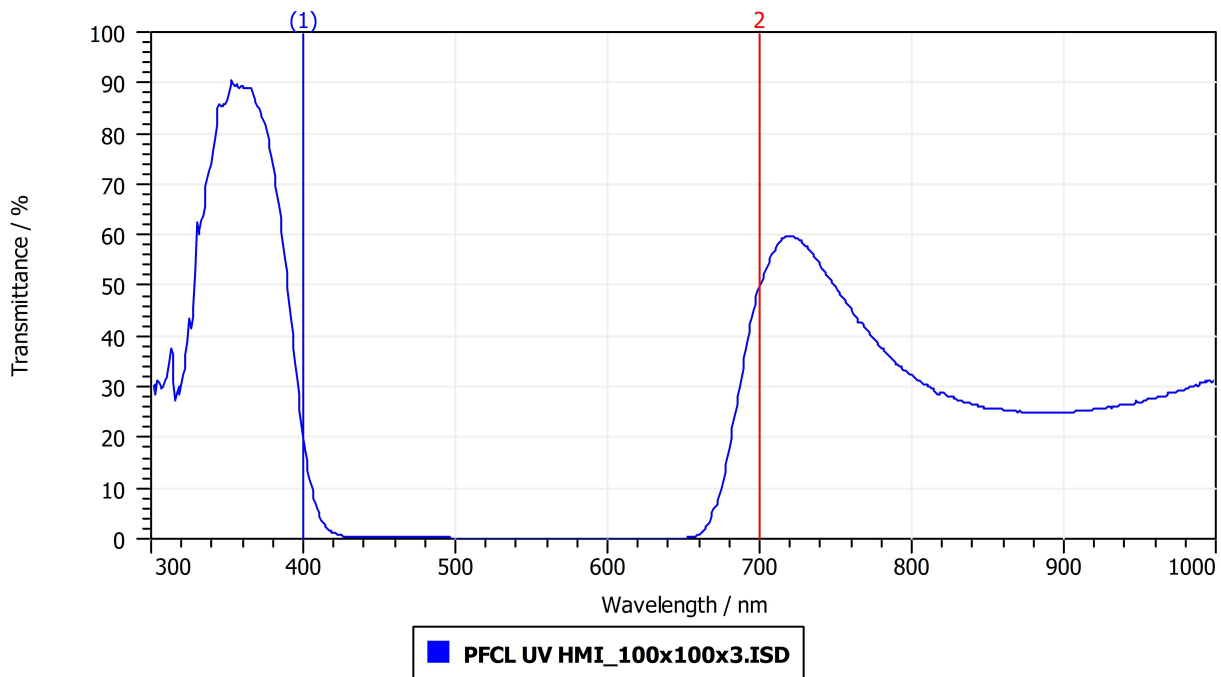

Results

Y Tau%	0,1452	Color coordinates:	x:	0,2874
Peak WL:	355,00 nm		y:	0,1212
Peak Transmission:	0,89		u:	0,2963
Width 50%:	63,61 nm		v:	0,1875
Width 10%:	0,00 nm		u':	0,2963
Width 1%:	0,00 nm		v':	0,2812

L*a*b*

L*: 1,3116
a*: 8,4812
b*: -8,0162
Ca*b*: -11,67
Ha*b*: -316,61

L*u*v*

L*: 1,3116
u*: 1,6782
v*: -3,211
Cu*v*: -1,3116
Hu*v*: 8,4812

Comment:

File name: C:\Users\Laptop-01\Desktop\MISURE CAS\Optical filters\Filters\PFCL UV HMI_100x100x3.ISD

Date: 26/03/2021 12:14:05